

ALLE

APPLICATION

- Street lighting, Area lighting

TECHNICAL INFO

- Made of aluminum polyester powder coated with different finishes and different ral colors, silicone gasket, and tempered glass diffuser.
- IP 66 protection
- IK 08 mechanical resistance
- Class I Electrical Protection
- Custom bracket mount
- LED light source, 220-240 V (50-60 Hz)
- Control System (optional): 1-10V, DALI, none(optional)
- Surge protection (optional): 2kv-6kV-10kV
- Operating temperature: -25°C / +55°C

FINISHING



- Polyester Powder Coating finish available in RAL Colors



40 - 144 Watt
Compatible



Asymmetrical
Symmetrical

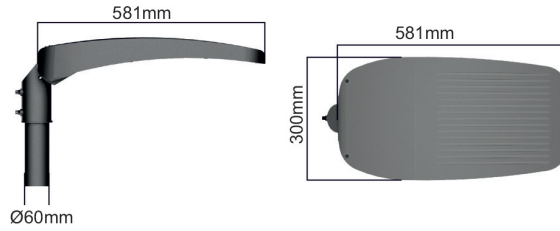

Product	Power	Lumen Output	Color Temp.
ALLE	40W	4201/4341 lm	3000K/4000K
ALLE	60W	6302/6512 lm	3000K/4000K
ALLE	100W	10711/11080 lm	3000K/4000K
ALLE	120W	12853/13296 lm	3000K/4000K
ALLE	144W	14424/15956 lm	3000K/4000K

*CRI>70: Power Factor >95, Drive current 350 ma-1050ma



Hilton Hotel. Istanbul / Turkey